



JIAYU F1 Battery Replacement

Replace the battery in your JIAYU F1.

Written By: Samantha Fruge



INTRODUCTION

This guide will provide instructions on how to remove the back case and replace the battery.



TOOLS:



- [iFixit Opening Tools](#) (1)
-

Step 1 — Turn Off the Phone




- Turn the phone off by holding down the power button located on the top of the phone.

Step 2 — Remove the Back Case

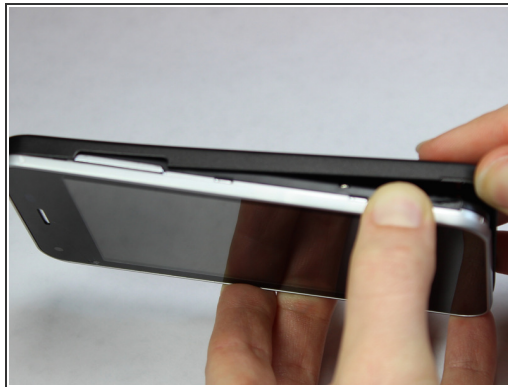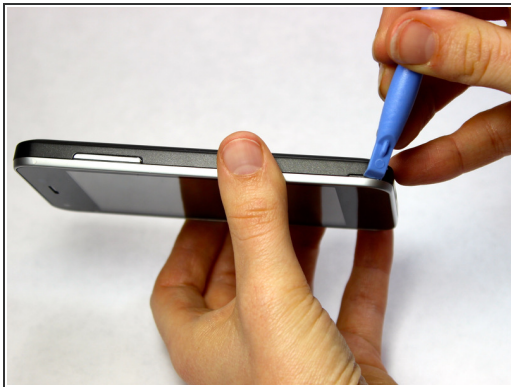

- Find the small indentation at the bottom right of the phone and pry open the back case of the phone using your fingernail or small plastic opening tool.
- Gently remove the back case completely from the phone.

Step 3 — Remove the Battery

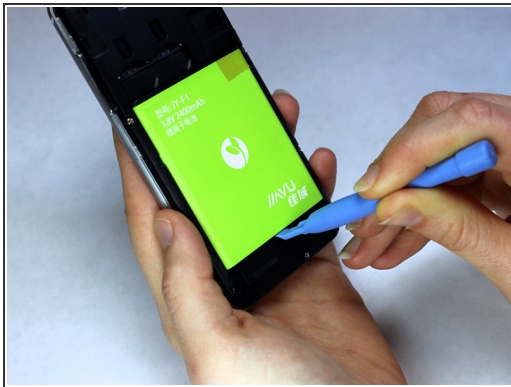

- Insert a fingernail or the small plastic opening tool into the recess in the bottom center of the battery and lift upward.
 - Remove the battery from the phone.
- i** When replacing the battery, align the copper ports on the top right of the battery with the corresponding ports in the battery cavity.*

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-13 02:41:38 AM.